



## Fixed Low Profile Flush-Fit LED Downlights

(t) 01372 888 455 (e) sales@flairlight.co.uk (w) www.flairlight.co.uk

### TECHNICAL DATA



Supply: 230Vac 6.5W  
 Electrical Safety: ClassII (No Earth Reqd.)  
 Ingress Protection: IP44 (Optional IP65 Bezel, with Clear Glass Lens, Part No: 40401.10)  
 Light Source: 6W COB LED  
 Bezel Finish: White (other finishes available)

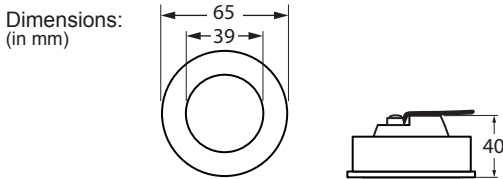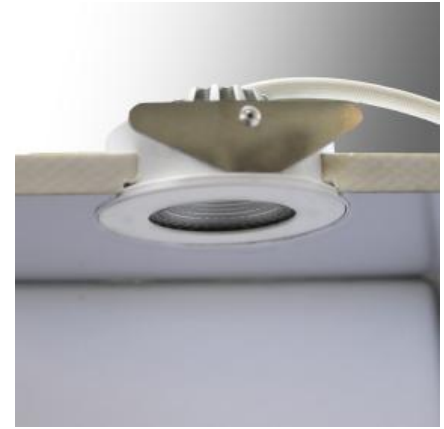

Part No.	40160.--	40161.--	40162.--	40163.--
CCT:	2800K Warm White	4000K Cool White	2800K Warm White	4000K Cool White
Beam Angle:	36°	36°	36°	36°
Luminous Flux:	600Lm	630Lm	600Lm	630Lm
L.E.D. Driver:	Mains Dimmable		DALI Dimmable ... For other dimming options contact Flairlight	



### INSTALLATION ..... IMPORTANT ... READ PAGE 2 BEFORE STARTING INSTALLATION



Isolate the electrical supply before undertaking any electrical work.

Installation must comply with the current wiring and building regulations.

